


TIMBER YARD / GRAVEL TIPPER

Assembly

1. Locate one short straight track section onto the base between the shed and the control lever. The four pegs will hold the track in position as shown.
2. Assemble the roof to the shed.
3. Assemble the storage bin, the centre notch to be placed over the control lever and the slots over the base tabs as indicated.

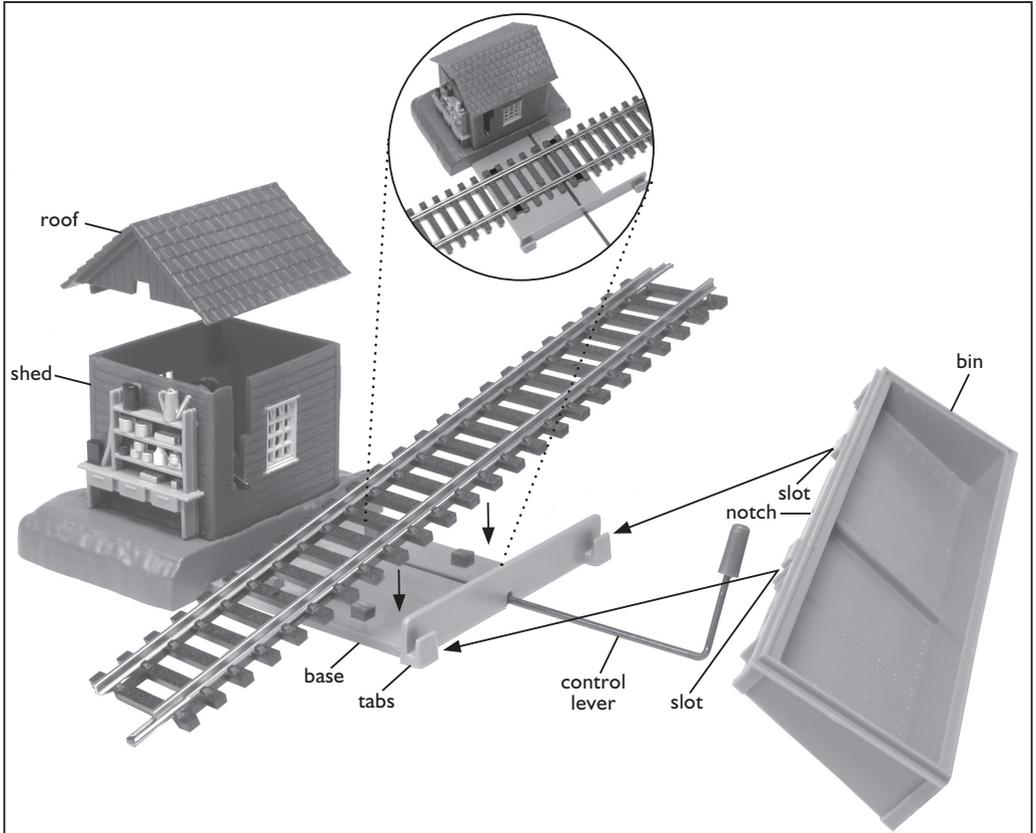

Operation

1. Place the cargo wagon onto the track so that the side that drops down is facing the storage bin.
2. Load cargo onto the wagon.
3. By pushing the control lever to the right, the cargo will drop into the bin.